


BLOWN FUSE INDICATOR FOR HIGH VOLTAGE CAPACITORS

FEATURES:

- OPERATED BY C.T. AND ELECTRONIC RELAY
- STANDARD IN 2 FUSE CONFIGURATION
- LIGHT FOR LOCAL
- TERMINAL BLOCK FOR REMOTE MONITORING
- MULTI CAPACITOR CONFIGURATION AVAILABLE

OPTION:

- * 3 DAMPING REACTORS
- ** 3 rd FUSE
- 3 rd CURRENT TRANSFORMER

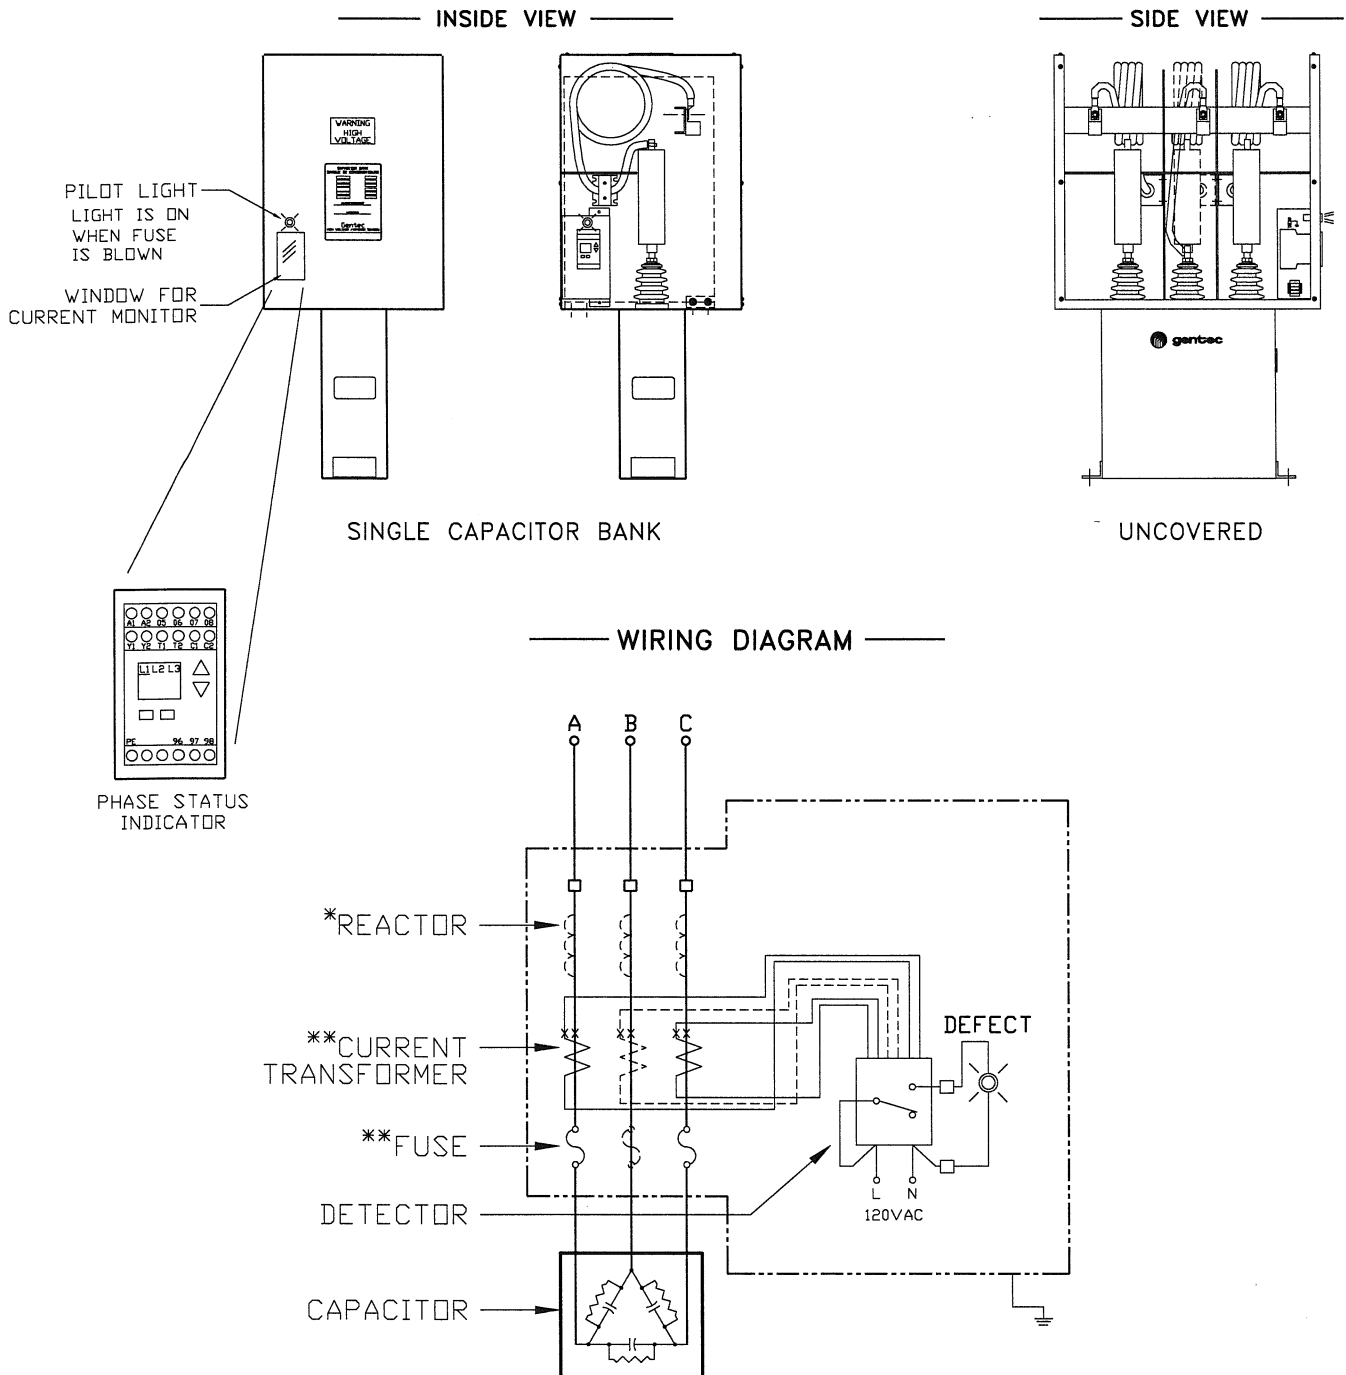

STANDARD TO
BE APPLIED



SK-6220

03/09/24